

As hygiene standards increase, YongSeal technology can seal the edge of the belts completely and bring new characteristics to your application as follows:

- Prevent latitudinal fiber pull out.
- · Avoid belt edge contamination.
- Better belt strength and stretch after long time using.
- Longer belt service time.
- Lower running costs.
- Easy to clean.
- Improved belt image.

YongSeal® belts are widely used for Food, Electronic, Tobacco, etc. industries which need high requirement for environmental hygiene and other special requirements.

Belt edges of conveyor belts are normally finished with cut edges and are not protected against external influence. YongLi edge capped concept can protect the belt edges of whole roll material.

YongSeal® technology

Before closed edge: Standard products.



In process: Fabric layer will be eliminated.




Final products: YongSeal can guarantee that the belt edge will bond with the belt itself completely without seam as a homogeneous unit.



YongSeal technology can be applied on different kinds of materials, such as PVC, PU and Hytrel belts.

Please inquire.

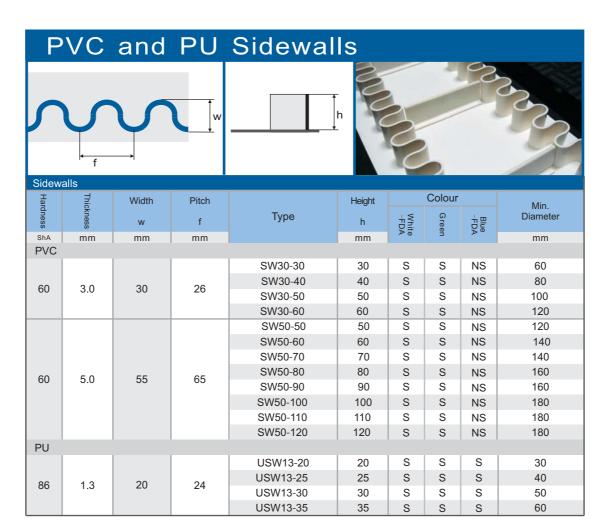



SHANGHAI YONGLI BELTING CO.,LTD.

ADDRESS: WEST OF XUHUA ROAD, XUJING TOWN, QINGPU DISTRICT, SHANGHAI, CHINA TEL: 0086-21-59884359

FAX: 0086-21-59884382 WEBSITE: www.yonglibelt.com EMAIL: info@yonglibelt.com

YONGLI EUROPE B.V.

ADDRESS: KOOLMAND 3, 1724 BC OUDKARSPEL, NETHERLANDS

NETHERLANDS TEL: 0031-226-399928 FAX: 0031-226-393707

FAX: 0031-226-393707 WEBSITE: www.yonglibelting.com EMAIL: info@yonglibelting.com



YONGLI Profiles

Guideropes, Cleats, Sidewalls Foils and YongSeal®










On the basis of close interaction with engineers and customers, YongLi developed different kinds of accessory parts, Guideropes, Cleats, Sidewalls, Notched guiderope and Yongseal closed edge, which would be able to meet the different requirements for efficient conveying applications.

YongLi also would like to make relevant researches and develop new kinds of profiles under the close cooperation with customers. For further information, please contact our salesman.

Due to the different kinds of materials, conveying environment and the weight of the goods every application situation will be different. Yong Li will be pleased to help you with your choice by giving suggestions and make relevant laboratory tests according to the given information and samples.

Engineer your movement

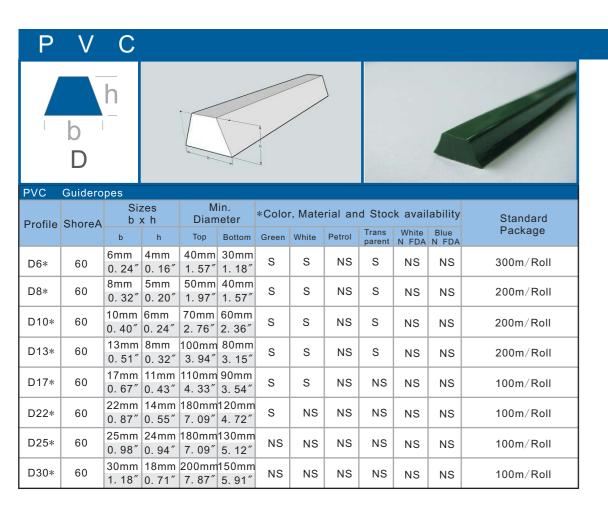

S: Standard-Stock NS: Non-Stock

For Non-Stock produts, Delivery time and Min quantity will be different from Standard-Stock products Please inquire.

N FDA: Oil and fat resistant comply with EU2002/72/EC

b	h _ -			Jan San San San San San San San San San S	b	h - X					h W		
PVC	VC Cleats Sizes *Color, Material and Stock availability												
Profile	ShoreA	b x h		Min. Diameter	*Color	r, Mate	rial an	Trans	Blue	White	Standard Package (2m/piece)		
T10*	60	10mm	10mm 0. 39"	40mm 1. 57″	S	S	NS	NS	N FDA	N FDA	200 pieces/Box		
T20*	60	_	20mm 0. 79"	90mm 3. 54″	S	S	NS	S	NS	NS	100 pieces/Box		
T30*	60	25mm 0. 98"	30mm 1. 18"	120mm 4. 72″	S	s	NS	S	NS	NS	50 pieces/Box		
T40*	60	25mm 0. 98"	40mm 1. 57"	120mm 4. 72″	s	s	NS	NS	NS	NS	50 pieces/Box		
T50*	60	25mm 0. 98"	50mm 1. 97"	120mm 4. 72″	NS	NS	NS	NS	NS	NS	25 pieces/Box		
T60*	60		60mm 2. 36"	150mm 5. 91″	NS	NS	NS	NS	NS	NS	25 pieces/Box		
T75*	60	45mm 1. 77"	75mm 2. 95″	160mm 6. 30″	NS	NS	NS	NS	NS	NS	25 pieces/Box		
T80*	60	47mm 1. 85"	80mm 3. 15"	180mm 7. 09″	NS	NS	NS	NS	NS	NS	25 pieces/Box		
X30*	60	25mm 0. 98"	30mm 1. 18"	40mm 1. 57″	s	s	NS	NS	NS	NS	50 pieces/Box		
X40*	60	30mm 1. 18"	40mm 1. 57"	60mm 2. 36″	s	s	NS	NS	NS	NS	50 pieces/Box		
X50*	60		50mm 1. 97″	80mm 3. 15″	s	s	NS	NS	NS	NS	25 pieces/Box		
X60*	60	35mm 1. 38"	60mm 2. 36"	80mm 3. 15″	NS	NS	NS	NS	NS	NS	25 pieces/Box		
X70*	60	40mm 1. 57"	70mm 2. 76″	100mm 3. 94″	NS	NS	NS	NS	NS	NS	20 pieces/Box		
X80*	60	-	80mm 3. 15"	120mm 4. 72″	NS	NS	NS	NS	NS	NS	20 pieces/Box		
W35*	60	_	35mm 1. 38"	130mm 5. 12″	S	S	NS	NS	NS	NS	50 pieces/Box		





PVC Foils									
Type	ShoreA	Standard M	easurement	Stock	Standard Package				
.,,,,		Length	Width	availability	, and the second				
PF Green	80	100m 328'	100mm 3. 93″	s	100m(L)*100mm(W)/Box				
PF White	80	100m 328'	100mm 3. 93″	S	100m (L) *100mm (W) / Box				
PF Petrol	80	100m 328'	100mm 3. 93″	S	100m(L)*100mm(W)/Box				
PF Blue FDA	80	100m 328'	100mm 3. 93″	NS	100m(L)*100mm(W)/Box				
PF White FDA	80	100m 328'	100mm 3. 93″	NS	100m(L)*100mm(W)/Box				

For achieving the highest application requirements, YongLi would like to develop new profiles of special sharp under the close interaction with engineers and customers.

Please inquire.









Spuare Guiderope


Trapezia Guiderope

Tower Cleat

Straight X Cleat

Limited by the conditions under which these pictures are taken, the belts as shown in the above pictures might be different

b UD U Guideropes Min. *Color, Material and Sizes Diameter Stock availability Standard bxh Profile ShoreA Package Top Bottom Dark Green White Petrol Trans parent b h 6mm | 4mm | 40mm | 30mm UD6* S NS NS NS 200m/Roll 60 0. 24" 0. 16" 1. 57" 1. 18" 8mm | 5mm | 50mm | 40mm WB48 60 S NS NS NS 200m/Roll 0. 32" 0. 20" 1. 97" 1. 57" 10mm | 6mm | 70mm | 60mm 60 UD10* S NS NS NS 100m/Roll 0. 40" 0. 24" 2. 76" 2. 36" 13mm 8mm 100mm 80mm UD13* 60 S NS NS NS 100m/Roll 0. 51" 0. 32" 3. 94" 3. 15"

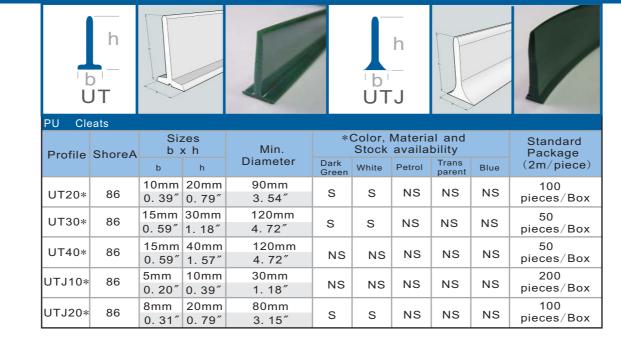





PU Foils						
Туре	ShoreA	Standard M	easurement	Stock	Standard Package	
.,,,,		Length	Width	availability	, and the second	
	92	100m	100mm	S	100m(L)*100mm(W)/Box	
UF Dark green		328'	3. 93″	3		
UF White	86	100m	100mm	S	100m(L)*100mm(W)/Box	
OF White		328'	3. 93"	3		
LIC Detroi	92	100m	100mm		100m(L)*100mm(W)/Box	
UF Petrol		328'	3. 93″	S		
UF Blue	86	100m	100mm	S	100m(L)*100mm(W)/Box	
OI DIGE	00	328'	3. 93″	5		
		•			·	